
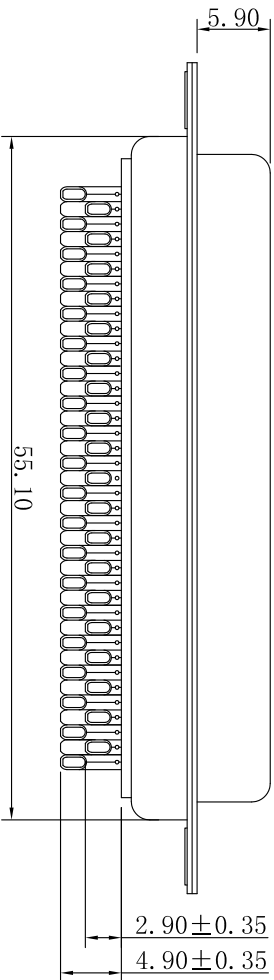



GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.02	m t

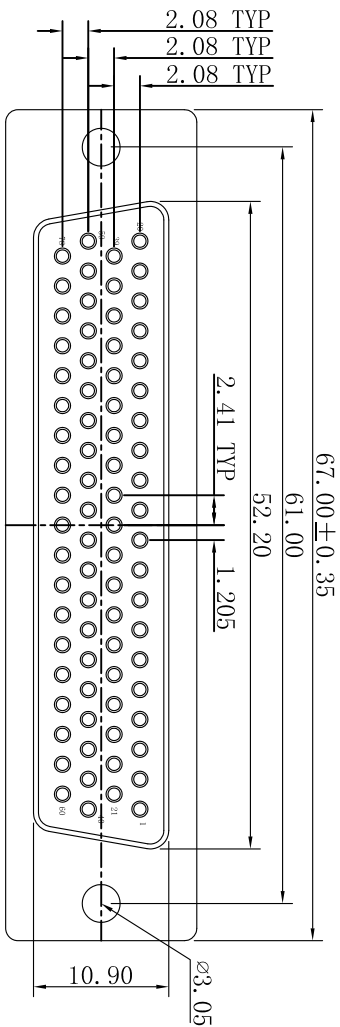

Specification Type

A	B	C

CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C ~ 105°C
7. INSERTION/EXTRACTION FORCE PER CONTACT: 17.6Kg Max 1.45Kg Min.

01.HDB078 F X XXX XX A XXX

PIN Poles 78:78PIN
M/F Differentiates M=Male F=Female
Hsg Color 1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple
Water Code H1=PB1 HF H2=PA6T HF H3=PA9T HF
Hsg Material H4=PA66 HF H5=I/CP H6=PP1 H7=PA6T H8=PA6T H9=PA6T H10=PP1 H11=PA6T H12=PA9T H13=PA66 H14=PA66

Plating B00:Braight sn M00:Matte sn
G00:Gold flash B01:Braight sn 1U" M01:Matte sn 1U"
G01:Gold 1U" B03:Braight sn 3U" M03:Matte sn 3U"
G03:Gold 3U" Bxx:Braight sn XXU" Mxx:Matte sn XXU"
Gxx:Gold XXU"



东莞市跃展精密连接器有限公司
Dongguan YueZhan Precision Connectors Co., Ltd

UNITS: mm [inch]	DESIGN: 2020.12.02	PART NAME: HDB 78F系列图
TOLERANCE: X.X ±0.35	CHECKED: 2020.12.02	PART NO. 01.HDB078XXXXXXXXXX
X.XX ±0.25	APPROVED: 2020.12.02	DRAW NO.
X.XXX ±0.15	SCALE:1:1 SIZE:A4	SHEET NO. 01 OF 01
Angle ±3.0°		