
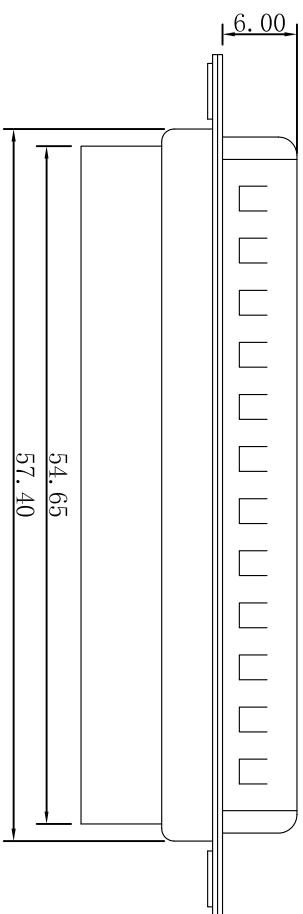
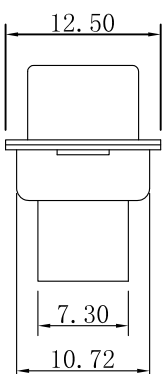


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2021.01.05	m t

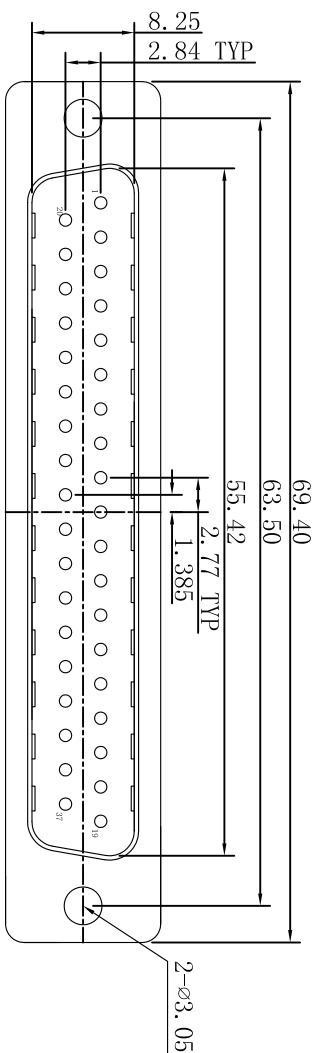

Specification Type

Specification Type	A	B	C

CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 12.5Kg Max
1.1Kg Min.

01.DEC037 M X XXX XX A XXX

PIN Poles 37:37PIN

M/F Differentiates M=Male F=Female

Hsg Color 1=Black 2=White 3=Blue 4=Green 5=Yellow 6=Purple

Plating G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"

B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"

M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"

H1=PB1 HF H2=PA6T HF H3=PA9T HF H4=PA66 HF H5=LCP H6=PPBT H7=PA6T H8=PA6T H9=PA66 H10=PPBT H11=PA6T H12=PA9T H13=PA66 H14=PA46

Water Code Specification Type Hsg Material

UNITS: mm [inch]

TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°

DESIGN: 2021.01.05

CHECKED: 2021.01.05

APPROVED: 2021.01.05

SCALE:1:1 SIZE:A4

东莞市跃展精密连接器有限公司
Dongguan YueZhan Precision Connectors Co.,Ltd

PART NAME: DEC 37M系列图

PART NO. 01.DEC037MXXXXXXXXXX

DRAW NO.

SHEET NO. 01 OF 01