

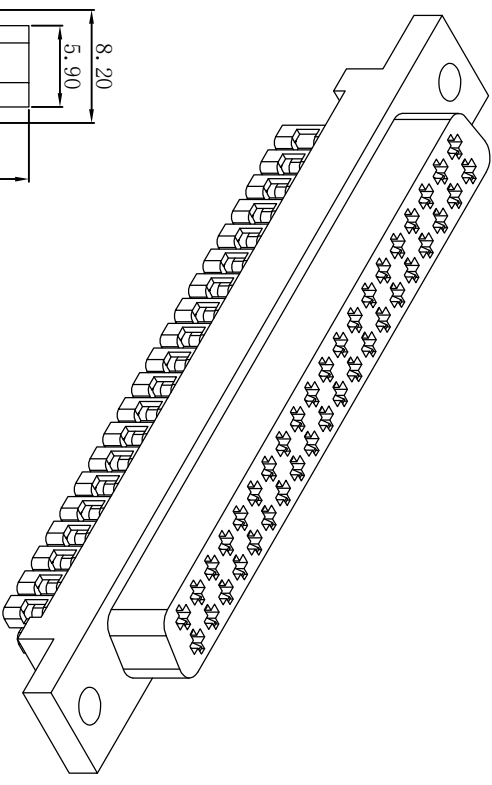




ROHS2.0

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本 (INITIAL EDITION)	2021.12.11	m t

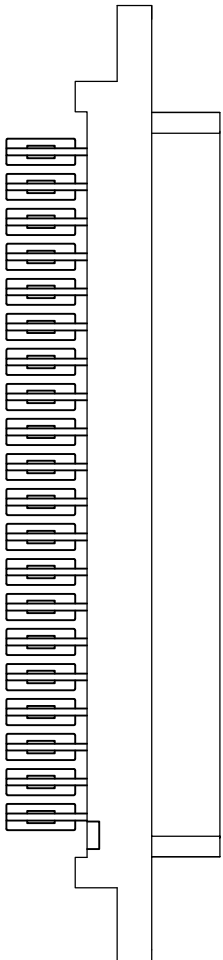

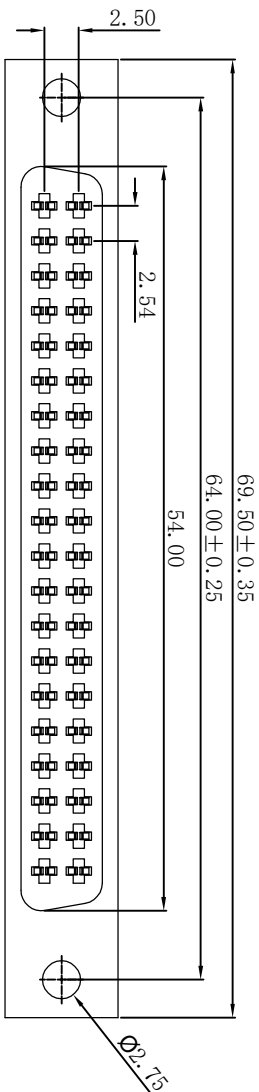

- 备注:
- 材料  
 塑胶: PBT+30%G.F (UL94V-0) 黑色,  
 端子: 青铜,  
 电镀: 半金锡1u", 镍30u"

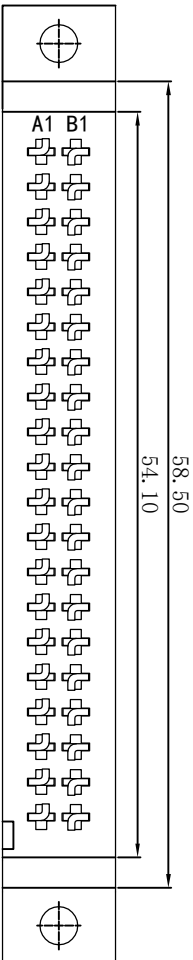- 规格  
 额定电流: 3A  
 温度范围: -40°C ~ +105°C  
 接触电阻: 20mΩ MAX at DC 1A  
 绝缘电阻: 5000MΩ MIN. at DC 500V  
 耐电压: AC 500V ac rms




**东莞市跃展精密连接器有限公司**  
 Dongguan Yuezhan Precision Connectors Co., Ltd  
 Tel: +86-769-8318391/2 Fax: +86-769-8318391 Web: www.dgzpc.com

 UNITS: mm [inch]	 TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	<b>DESIGN:</b> 卓涛 2021.12.11	<b>PART NAME:</b> FCN 40P IN黑半金IU-无台阶
<b>CHECKED:</b> 卓涛 2021.12.11	<b>PART NO.</b> 01.FCN040P1-B0110A01	<b>APPROVED:</b> 卓涛 2021.12.11	<b>DRAW NO.</b> YZPC-FCN0-001
<b>SCALE:</b> 1:1 <b>SIZE:</b> A4	<b>SHEET NO.</b> 01 OF 01		